

Soft starter, Altistart 480, 38A, 208 to 690V AC, control supply 110 to 230V AC

ATS480D38Y

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Altivar Soft Starter ATS480	
Product or Component Type	Soft starter	
Product destination	Asynchronous motors	
Product Specific Application	Process and infrastructures	
Device short name	ATS480	
Phase	3 phase	
Utilisation category	AC-3A AC-53A	
Ue power supply voltage	208690 V - 1510 %	
power supply frequency	5060 Hz - 2020 %	
[le] rated operational current	Normal duty 38.0 A 104 °F (40 °C))	
rated current in heavy duty	32.0 A at 104 °F (40 °C) heavy duty	
IP Degree of Protection	IP20	
Motor power kW	9.0 kW 230 V in the motor supply line normal duty 7.5 kW 230 V in the motor supply line heavy duty 18.5 kW 400 V in the motor supply line normal duty 15.0 kW 400 V in the motor supply line heavy duty 18.5 kW 440 V in the motor supply line normal duty 15.0 kW 440 V in the motor supply line normal duty 22.0 kW 500 V in the motor supply line heavy duty 22.0 kW 500 V in the motor supply line normal duty 18.5 kW 525 V in the motor supply line normal duty 18.5 kW 525 V in the motor supply line heavy duty 30.0 kW 660 V in the motor supply line normal duty 22.0 kW 660 V in the motor supply line heavy duty 30.0 kW 660 V in the motor supply line normal duty 22.0 kW 690 V in the motor supply line heavy duty 30.0 kW 690 V in the motor supply line heavy duty 18.5 kW 230 V to the motor delta terminals normal duty 15.0 kW 230 V to the motor delta terminals heavy duty 30.0 kW 400 V to the motor delta terminals normal duty	
Maximum Horse Power Rating Option card	10.0 hp 208 V normal duty 7.5 hp 208 V heavy duty 10.0 hp 230 V heavy duty 25.0 hp 460 V normal duty 20.0 hp 460 V heavy duty 30.0 hp 575 V normal duty 25.0 hp 575 V heavy duty Communication module Profibus DP V1	
	Communication module Modbus TCP/EtherNet/IP Communication module CANopen daisy chain Communication module CANopen Sub-D Communication module CANopen open style Communication module PROFINET	

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Complementary

Device connection	In the motor supply line To the motor delta terminals
[Us] control circuit voltage	110230 V AC 50/60 Hz - 1510 %
Apparent power	0.09 kVA
Integrated motor overload protection	True
motor thermal protection class	Class 10E
Protection type	Phase failure line Integrated thermal protection motor Thermal protection starter Current overload motor Underload motor Excessive starting time, locked rotor motor Motor phase loss motor Line supply phase loss line Line supply phase loss motor Thermal protection motor
current limiting %In (5 x le maximum)	150700 %
[In] Rated current pwr loss specifctn	38.0 A
Power loss static current independent	25.0 W
Power loss per device current dependent	96.0 W
Standards	IEC 60947-4-2 UL 60947-4-2 IEC 60664-1
Product Certifications	CE cULus CCC UKCA RCM EAC DNV ABS BV CCS
Marking	CE CCC UKCA EAC RCM CULus
[Uc] control circuit voltage	24 V DC
Discrete input number	4
Discrete input type	STOP) logic inputs, 3500 Ohm RUN) logic inputs, 3500 Ohm DI3) programmable as logic input, 3500 Ohm DI4) programmable as logic input, 3500 Ohm
Input compatibility	STOP discrete input level 1 PLC IEC 61131-2 RUN discrete input level 1 PLC IEC 61131-2 DI3 discrete input level 1 PLC IEC 61131-2 DI4 discrete input level 1 PLC IEC 61131-2
Discrete input logic	Programmable digital input < 5 V
Relay output number	3
Relay output type	Relay outputs R1A 1 NO Relay outputs R1B 1 NO Relay outputs RIC NO/NC programmable

Maximum switching current	Relay outputs 2 A 250 V AC Relay outputs 2 A 30 V DC	
Discrete output number	2	
Discrete output type	DQ1) programmable digital output <= 30 V DQ2) programmable digital output <= 30 V	
Output compatibility	Open collector level 1 PLC IEC 65A-68	
Analogue input number	1	
Analogue input type	Al1/PTC PTC/Pt 100 temperature probe PTC2 PTC/Pt 100 temperature probe PTC3 PTC/Pt 100 temperature probe	
Analogue output number	1	
Analogue output type	Current output AQ1 020 mA or 010 V 500 Ohm	
Communication Port Protocol	Modbus serial	
Connector Type	1 RJ45	
Communication data link	Serial	
Physical interface	2-wire RS 485	
Transmission Rate	1200256000 bit/s	
Transmission frame	RTU	
Data format	8 bits, configurable odd, even or no parity	
Type of polarization	No impedance Modbus serial	
Number of addresses	0227 Modbus serial	
Method of access	Slave Modbus serial	
Function Available	External bypass control Pre-heating Smoke extraction Multi-motor cascade Second motor set User management Ports and services hardening Security event logging Cybersecure firmware update Single direction	
Display screen available	True	
Operating position	Vertical +/- 10 degree	
Height	10.8 in (275.0 mm)	
Width	6.3 in (160.0 mm)	
Depth	8.0 in (203.0 mm)	
Net Weight	10.8 lb(US) (4.9 kg)	

Environment

Electromagnetic compatibility	Conducted and radiated emissions level A conforming to IEC 60947-4-2 Conducted and radiated emissions with bypass level B conforming to IEC 60947-4-2 Damped oscillating waves level 3 conforming to IEC 61000-4-12 Electrostatic discharge level 3 conforming to IEC 61000-4-11 Immunity to electrical transients level 4 conforming to IEC 61000-4-4 Immunity to radiated radio-electrical interference level 3 conforming to IEC 61000-4-3 Voltage/current impulse level 3 conforming to IEC 61000-4-5
Pollution degree	Level 3
[Uimp] rated impulse withstand voltage	6 kV
[Ui] rated insulation voltage	690 V

Environmental class (during operation)	Class 3C3 according to IEC 60721-3-3 Class 3S2 according to IEC 60721-3-3	
,	Class 332 according to IEC 00721-3-3	
Relative humidity	095 % without condensation or dripping water IEC 60068-2-3	
Ambient air temperature for operation	104140 °F (4060 °C) (with current derating of 2 % per °C) 5104 °F (-1540 °C) (without derating)	
Ambient Air Temperature for Storage	-13158 °F (-2570 °C)	
Operating altitude	<= 3280.84 ft (1000 m) without derating > 3280.8413123.36 ft (> 10004000 m) with current derating 1 % per 100 m	
Maximum deflection under vibratory load (during operation)	1.5 mm at 213 Hz	
Maximum deflection under vibratory load (during storage)	1.75 mm at 29 Hz	
Maximum deflection under vibratory load (during transport)	1.75 mm at 29 Hz	
Maximum acceleration under vibrational stress (during operation)	10 m/s² at 13200 Hz	
Maximum acceleration under vibratory load (during storage)	15 m/s² at 200500 Hz 10 m/s² at 9200 Hz	
Maximum acceleration under vibratory load (during transport)	15 m/s² at 200500 Hz 10 m/s² at 9200 Hz	
Maximum acceleration under shock impact (during operation)	150 m/s² at 11 ms	
Maximum acceleration under shock load (during storage)	100 m/s² at 11 ms	
Maximum acceleration under shock load (during transport)	100 m/s² at 11 ms	

Ordering and shipping details

Category	US1CP1G22588	
Discount Schedule	CP1G	
GTIN	3606481089021	
Returnability	Yes	
Country of origin	ID	

Packing Units

Unit Type of Package 1	PCE	
Nbr. of units in pkg.	1	
Package 1 Height	11.693 in (29.700 cm)	
Package 1 Width	10.551 in (26.800 cm)	
Package 1 Length	14.370 in (36.500 cm)	
Package weight(Lbs)	13.545 lb(US) (6.144 kg)	
Unit Type of Package 2	S06	
Number of Units in Package 2	8	
Package 2 Height	29.528 in (75.000 cm)	
Package 2 Width	23.622 in (60.000 cm)	
Package 2 Length	31.496 in (80.000 cm)	
Package 2 Weight	144.954 lb(US) (65.750 kg)	



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	3442
Environmental Disclosure	Product Environmental Profile

Use Better

⊗ Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	411029a0-6a52-4ec9-8a30-b0c07e93ba50
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Use Again

○ Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings


Dimensions


Front, Side and Rear View

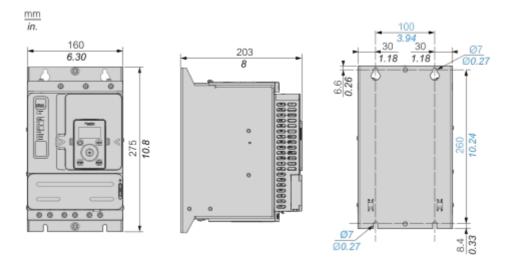

Connections and Schema

Power Connections






(1): Mains side(2): Motor side

1/L1, 3/L2, 5/L3 : Mains supply inputs 2/T1, 4/T2, 6/T3 : Outputs to motor A2, B2, C2 : Soft starter bypass


ATS480D38Y

Connection in line, with line contactor, no bypass, type 1 or 2 coordination, non-reversing, 2-wire or 3-wire control

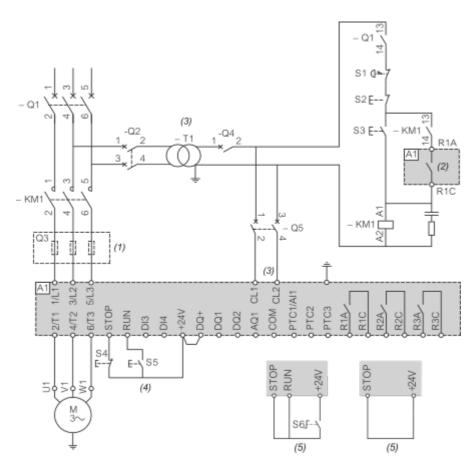

- (1): Installation of additional fast-acting fuses to upgrade to type 2 coordination according to IEC 60947–4–2.
- (2): Take into account the electrical characteristics of the relays (Control Terminal Characteristics).
- (3) : The transformer must supply 110...230 VAC +10% 15%, 50/60Hz.
- (4): RUN and STOP Management (3-wire control).
- (5): RUN and STOP Management (2-wire control).


Connection in line, with line and bypass contactor, freewheel or controlled stop, type 1 or 2 coordination, non reversing, 2-wire or 3-wire

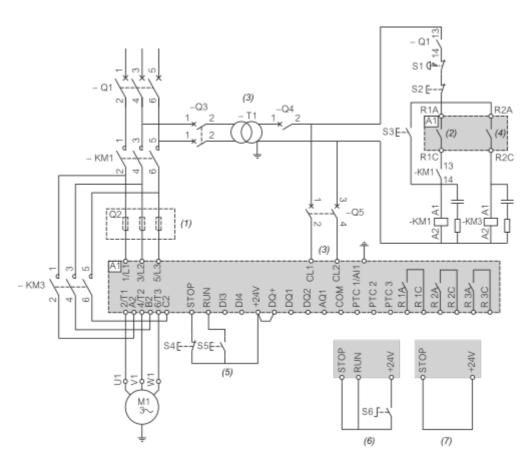

- (1): Installation of additional fast-acting fuses to upgrade to type 2 coordination according to IEC 60947-4-2.
- (2): Take into account the electrical characteristics of the relays (Control Terminal Characteristics).
- (3): The transformer must supply 110...230 VAC +10% 15%, 50/60Hz.
- (4): Take into account the electrical characteristics of the relays, especially when connecting to high rating contactor (Control Terminal Characteristics).
- (5): RUN and STOP Management (3-wire control).
- (6): RUN and STOP Management (2-wire control).
- (7): PC or PLC control


ATS480D38Y

Connection inside the delta, with line and bypass contactor, type 1 and 2 coordination, non reversing, 2 wire or 3 wire

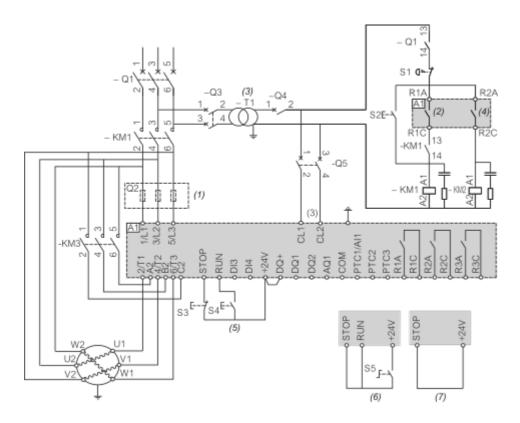

- (1): Installation of additional fast-acting fuses to upgrade to type 2 coordination according to IEC 60947–4–2.
- (2): Take into account the electrical characteristics of the relays (Control Terminal Characteristics).
- (3): The transformer must supply 110...230 VAC +10% 15%, 50/60Hz.
- (4): Take into account the electrical characteristics of the relays, especially when connecting to high rating contactor (Control Terminal Characteristics).
- (5): RUN and STOP Management (3-wire control).
- (6): RUN and STOP Management (2-wire control).
- (7): PC or PLC control

Control block wiring diagram

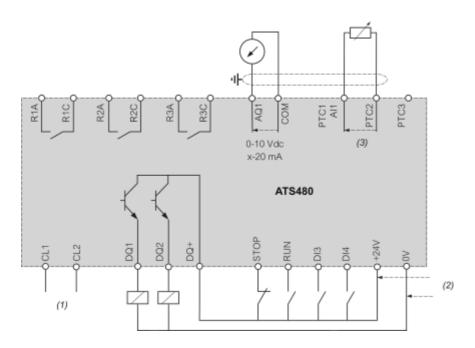

(1): Control power supply 110-230 VAC

(2) : External supply 24 VDC(3) : 2 Wires PTC/PT100

R1A, R1C, R3A, R3C : Sequence relay

R2A, R2C : End of start

STOP, RUN, DI3, DI4 : Digital inputs


AQ1: Analogue output

PTC1/AI1, PTC2, PTC3: PTC or PT100 connection

DQ1, DQ2, DQ+ : Digital outputs


Mounting and Clearance

Mounting Position

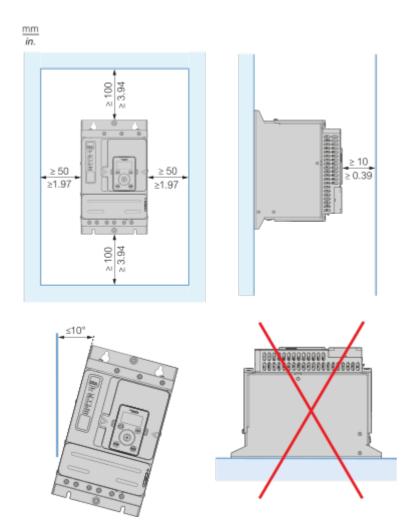


Technical Illustration

Dimensions

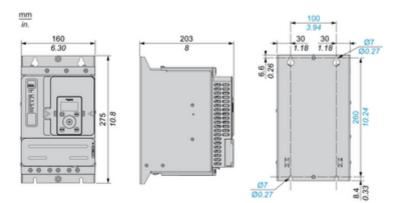

Technical Illustration

Wiring diagram

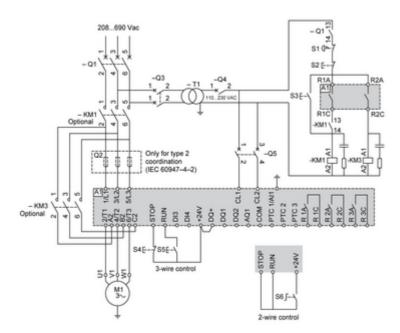

Product data sheet

ATS480D38Y

Image of product / Alternate images

Alternative





