

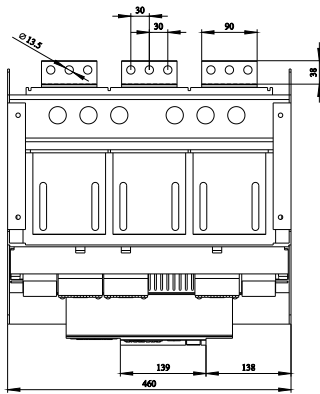

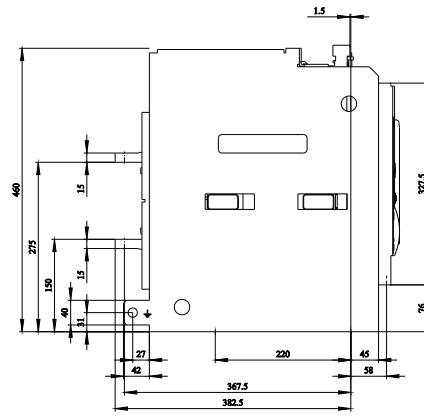


withdrawable circuit breaker with guide frame 3-pole, size II, IEC In=2500A to 690V, AC50/60Hz Icu=66kA at 500V rear connection horizontal Overcurrent release ETU 27 LSING protection adjustable 0.4-1 in Ground fault/N protection integrated With manual operating mechanism with storage with mechanical request without 1st auxiliary release without 2nd auxiliary release 2NO+2NC

| Model                                                                                                 |                                                    |
|-------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| design of the product                                                                                 | IEC 60947-2                                        |
| design of the actuating element                                                                       | Pushbutton                                         |
| type of the driving mechanism                                                                         | Manual operating mechanism with mechanical closing |
| type of the driving mechanism / motor drive                                                           | No                                                 |
| design of the overcurrent release                                                                     | ETU27B                                             |
| General technical data                                                                                |                                                    |
| number of poles                                                                                       | 3                                                  |
| size of the circuit-breaker                                                                           | 2                                                  |
| utilization category                                                                                  | B                                                  |
| Voltage                                                                                               |                                                    |
| insulation voltage / rated value                                                                      | 1 000 V                                            |
| operating voltage                                                                                     |                                                    |
| • at AC / at 50/60 Hz / rated value                                                                   | 690 V                                              |
| Protection class                                                                                      |                                                    |
| protection class IP                                                                                   | IP20                                               |
| protection class IP / on the front                                                                    | IP20                                               |
| protection function of the overcurrent release                                                        | LSING                                              |
| Dissipation                                                                                           |                                                    |
| power loss [W]                                                                                        |                                                    |
| • for rated value of the current / at AC / in hot operating state / per pole                          | 173.3 W                                            |
| • maximum                                                                                             | 520 W                                              |
| Main circuit                                                                                          |                                                    |
| operating frequency                                                                                   |                                                    |
| • 1 / rated value                                                                                     | 50 Hz                                              |
| • 2 / rated value                                                                                     | 60 Hz                                              |
| Auxiliary circuit                                                                                     |                                                    |
| number of NC contacts / for auxiliary contacts                                                        | 2                                                  |
| number of NO contacts / for auxiliary contacts                                                        | 2                                                  |
| Suitability                                                                                           |                                                    |
| suitability for use                                                                                   | Plant / motor protection                           |
| Adjustable parameters                                                                                 |                                                    |
| adjustable current response value current / of the current-dependent overload release / initial value | 1 000 A                                            |
| Product details                                                                                       |                                                    |
| product component                                                                                     |                                                    |
| • trip indicator                                                                                      | Yes                                                |
| • voltage trigger                                                                                     | No                                                 |
| • undervoltage release                                                                                | No                                                 |
| design of the auxiliary switch                                                                        | 2 NO + 2 NC                                        |
| product extension / optional / motor drive                                                            | Yes                                                |
| Product function                                                                                      |                                                    |
| product function                                                                                      |                                                    |
| • grounding protection                                                                                | Yes                                                |
| • phase failure detection                                                                             | Yes                                                |
| Display and operation                                                                                 |                                                    |

|                                                                                                                                                                                                                                                                              |                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| display version                                                                                                                                                                                                                                                              | without display                      |
| <b>Short circuit</b>                                                                                                                                                                                                                                                         |                                      |
| operating short-circuit current breaking capacity (Ics)                                                                                                                                                                                                                      |                                      |
| • at 415 V / rated value                                                                                                                                                                                                                                                     | 66 kA                                |
| • at 500 V / rated value                                                                                                                                                                                                                                                     | 66 kA                                |
| • at 690 V / rated value                                                                                                                                                                                                                                                     | 50 kA                                |
| maximum short-circuit current breaking capacity (Icu)                                                                                                                                                                                                                        |                                      |
| • at 415 V / rated value                                                                                                                                                                                                                                                     | 66 kA                                |
| • at 500 V / rated value                                                                                                                                                                                                                                                     | 66 kA                                |
| • at 690 V / rated value                                                                                                                                                                                                                                                     | 50 kA                                |
| <b>Connections</b>                                                                                                                                                                                                                                                           |                                      |
| arrangement of electrical connectors / for main current circuit                                                                                                                                                                                                              | Main connection rear side horizontal |
| type of electrical connection / for main current circuit                                                                                                                                                                                                                     | busbar connection                    |
| <b>Mechanical Design</b>                                                                                                                                                                                                                                                     |                                      |
| height                                                                                                                                                                                                                                                                       | 465.5 mm                             |
| width                                                                                                                                                                                                                                                                        | 460 mm                               |
| depth                                                                                                                                                                                                                                                                        | 456 mm                               |
| fastening method                                                                                                                                                                                                                                                             | drawer unit                          |
| Net Weight                                                                                                                                                                                                                                                                   | 99.2 kg                              |
| <b>Environmental conditions</b>                                                                                                                                                                                                                                              |                                      |
| ambient temperature / during operation                                                                                                                                                                                                                                       |                                      |
| • minimum                                                                                                                                                                                                                                                                    | -20 °C                               |
| • maximum                                                                                                                                                                                                                                                                    | 70 °C                                |
| ambient temperature / during storage                                                                                                                                                                                                                                         |                                      |
| • minimum                                                                                                                                                                                                                                                                    | -40 °C                               |
| • maximum                                                                                                                                                                                                                                                                    | 70 °C                                |
| <b>Further information</b>                                                                                                                                                                                                                                                   |                                      |
| Information on the packaging<br><a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>                                                                                                      |                                      |
| Information for data generation and storage<br><a href="https://support.industry.siemens.com/cs/ww/en/view/109995012">https://support.industry.siemens.com/cs/ww/en/view/109995012</a>                                                                                       |                                      |
| Information- and Downloadcenter (Catalogs, Brochures,...)<br><a href="https://www.siemens.com/lowvoltage/catalogs">https://www.siemens.com/lowvoltage/catalogs</a>                                                                                                           |                                      |
| Industry Mall (Online ordering system)<br><a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1225-2DG36-1AA2">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1225-2DG36-1AA2</a>                                            |                                      |
| Service&Support (Manuals, Certificates, Characteristics, FAQs,...)<br><a href="https://support.industry.siemens.com/cs/ww/en/ps/3WL1225-2DG36-1AA2">https://support.industry.siemens.com/cs/ww/en/ps/3WL1225-2DG36-1AA2</a>                                                  |                                      |
| Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)<br><a href="https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1225-2DG36-1AA2">https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1225-2DG36-1AA2</a> |                                      |
| CAx-Online-Generator<br><a href="https://www.siemens.com/cax">https://www.siemens.com/cax</a>                                                                                                                                                                                |                                      |
| Tender specifications<br><a href="https://www.siemens.com/specifications">https://www.siemens.com/specifications</a>                                                                                                                                                         |                                      |
| Characteristic curves<br><a href="https://curves.simaris.siemens.com/curves/&lt;mmp_prod_noCOMP='HAUPT'&gt;&lt;/mmp_prod_no&gt;">https://curves.simaris.siemens.com/curves/&lt;mmp_prod_noCOMP='HAUPT'&gt;&lt;/mmp_prod_no&gt;</a>                                           |                                      |



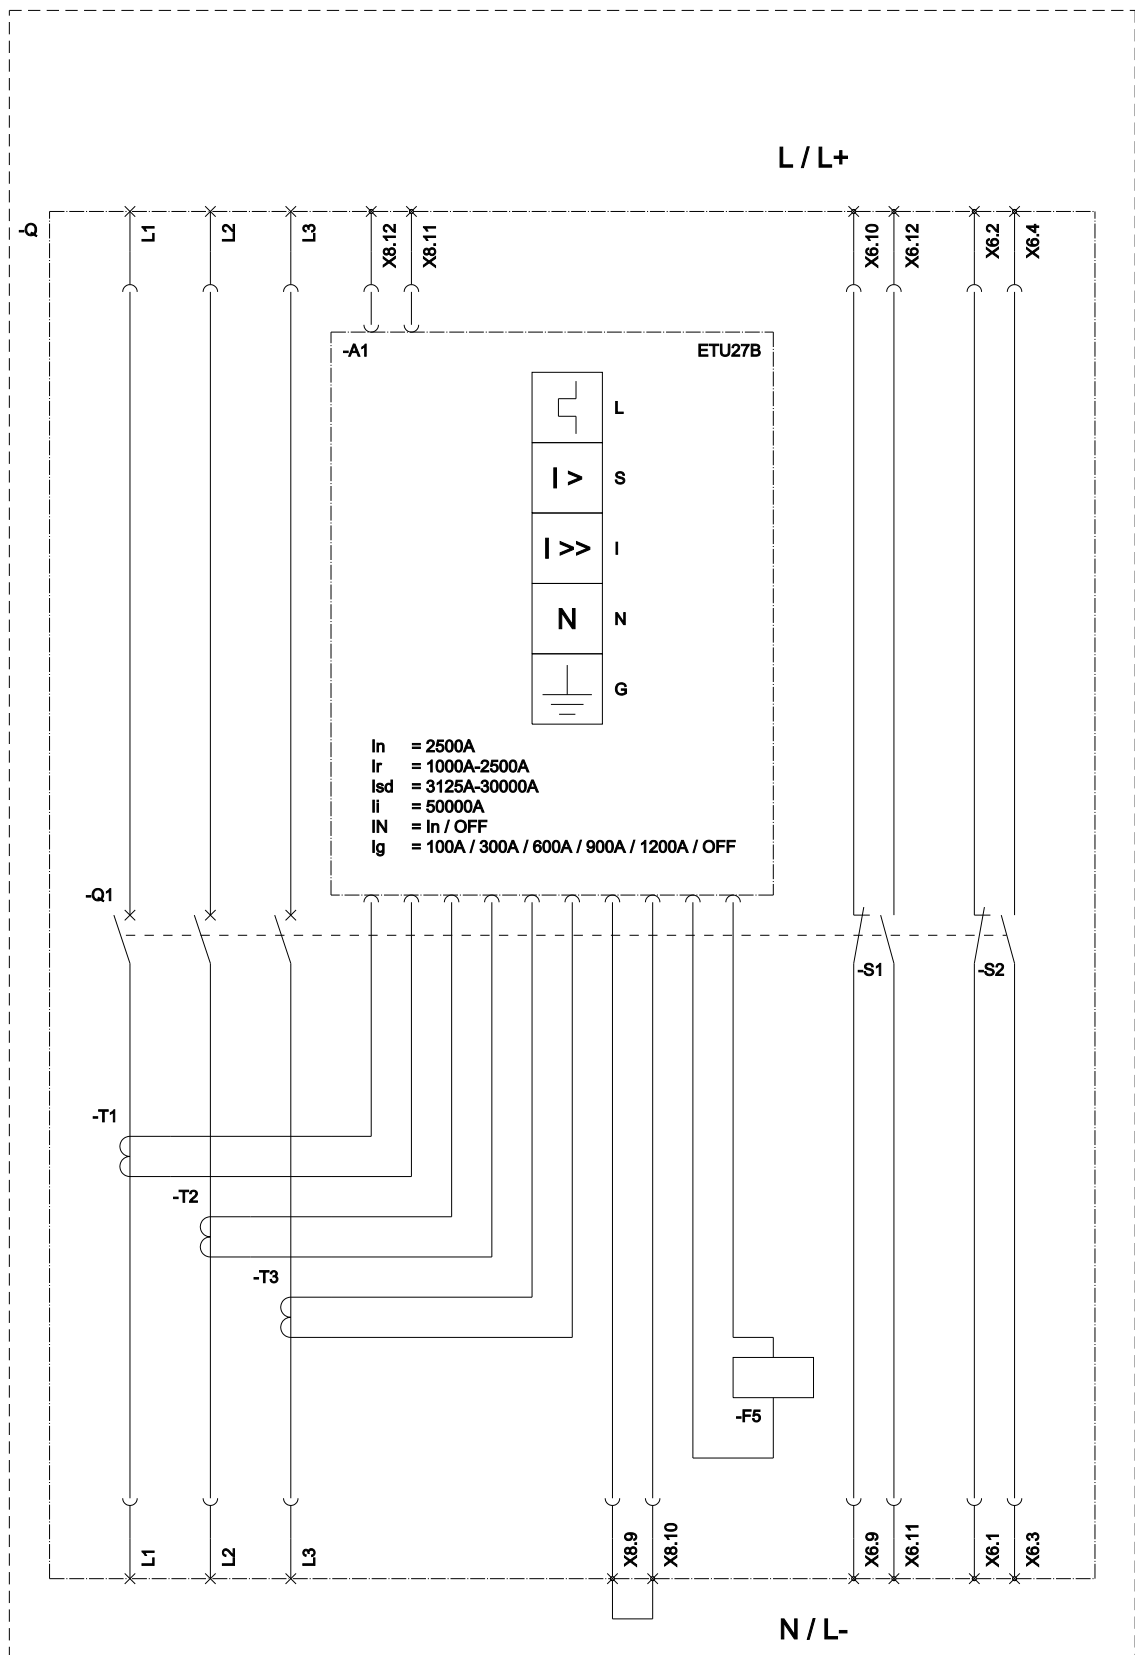

L (Long Time Delay / Überlastschutz); S (Short Time Delay / Kurzschlusschutz, kurzzeitverzögert);  
 I (Instantaneous / Kurzschlusschutz, unverzögert); N (Neutral Protection / Neutralleiterschutz);  
 G (Ground Fault Protection / Erdschlusschutz); F5 (Magnet for trip unit / Auslösemagnet); S1 - S8 (Auxiliary switch / Hilfsschalter);



