

TeSys Deca, auxiliary contact block, 2 NO and 2 NC, top mount, screw clamp terminals, for LC1D09 to LC1D150 contactors

LADN22

Product availability: Stock - Normally stocked in distribution facility

Main

Mani		
Range	TeSys TeSys Deca	
product name	TeSys Deca	
Product or Component Type	Auxiliary contact block	
Device short name	LADN	
Range compatibility	TeSys D CAD TeSys D LC1D TeSys F LC1F TeSys F CR1F TeSys Deca CAD TeSys Deca LC1D	
Mounting Location	Front	
Pole contact composition	2 NO + 2 NC	
Contacts operation	Instantaneous	
[Ue] rated operational voltage	690 V AC 25400 Hz	
[le] rated operational current	6 A at 120 V AC-15 1.04 A at 690 V AC-15 0.55 A at 125 V DC-13 0.1 A at 600 V DC-13	
[Ui] rated insulation voltage	690 V IEC 60947-5-1 600 V UL 600 V CSA	
[Ith] conventional free air thermal current	10 A (at 140 °F (60 °C))	
Standards	EN/IEC 60947-5-1 GB/T 14048.5 EN 50012 UL 60947-5-1 CSA C22.2 No 60947-5-1 IEC 60335-1:Clause 30.2 IEC 60335-2-40:Annex JJ UL 60335-2-40:Annex JJ	
Product Certifications	CB Scheme UL CSA CCC EAC UKCA	

Complementary

Irms rated making capacity 140 A AC conforming to IEC 60947-5-1 250 A DC conforming to IEC 60947-5-1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

·	
30 Mcycles	
5 mA	
ble end	
cable end	
with cable end	
cable end	
able end	
able end	
1.9 in (48 mm)	
1.7 in (44 mm)	
1.7 in (42 mm)	
0.11 lb(US) (0.05 kg)	
Dark grey	

Environment

Environmental characteristic	Normal environment	
IP degree of protection	IP20 conforming to IEC 60529	
Protective treatment	TH IEC 60068	
Ambient Air Temperature for Storage	-76176 °F (-6080 °C)	
Ambient air temperature for operation	23140 °F (-560 °C)	
Operating altitude	9842.52 ft (3000 m)	

Ordering and shipping details

Category	US10l1222341
Discount Schedule	0112
GTIN	3389110384031
Returnability	Yes
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.97 in (5.000 cm)
Package 1 Width	1.97 in (5.000 cm)
Package 1 Length	1.73 in (4.400 cm)

Package 1 Weight	2.187 oz (62.000 g)	
Unit Type of Package 2	S03	
Number of Units in Package 2	160	
Package 2 Height	11.81 in (30.000 cm)	
Package 2 Width	11.81 in (30.000 cm)	
Package 2 Length	15.75 in (40.000 cm)	
Package 2 Weight	22.913 lb(US) (10.393 kg)	
Unit Type of Package 3	P06	
Number of Units in Package 3	1280	
Package 3 Height	29.53 in (75.000 cm)	
Package 3 Width	23.62 in (60.000 cm)	
Package 3 Length	31.50 in (80.000 cm)	
Package 3 Weight	201.723 lb(US) (91.500 kg)	

Contractual warranty

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

∇ Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	4
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACh Regulation	REACh Declaration

Use Again

○ Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings


Approximate Dimensions

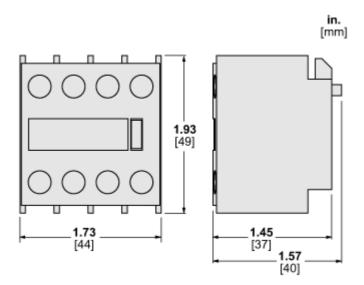



LADN22

Technical Illustration

Dimensions







in. [mm]