

# circuit breaker, EasyPact EZC100H ,TMD, 75A ,3 poles 3d

EZC100H3075

## Main

mam		
Range of product	EasyPact	
Product or component type	Circuit breaker	
Device short name	Easypact EZC100H	
Circuit breaker name	Easypact EZC100H	
Device application	Distribution	
Poles description	3P	
Protected poles description	3t	
Network type	AC DC	
Network frequency	50/60 Hz	
[In] rated current	75 A at 40 °C	
[Ui] rated insulation voltage	690 V AC 50/60 Hz conforming to IEC 60947-2	
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-2	
[Ue] rated operational voltage	550 V AC 50/60 Hz conforming to IEC 60947-2 250 V DC conforming to IEC 60947-2	
Breaking capacity code	н	
Breaking capacity	10 kA Icu at 125 V DC 1P conforming to IEC 60947-2 10 kA Icu at 250 V DC 2P conforming to IEC 60947-2 10 kA Icu at 550 V AC 50/60 Hz conforming to IEC 60947-2 100 kA Icu at 110130 V AC 50/60 Hz conforming to IEC 60947-2 100 kA Icu at 220240 V AC 50/60 Hz conforming to IEC 60947-2 20 kA Icu at 440 V AC 50/60 Hz conforming to IEC 60947-2 30 kA Icu at 380 V AC 50/60 Hz conforming to IEC 60947-2 30 kA Icu at 4400415 V AC 50/60 Hz conforming to IEC 60947-2	
[Ics] rated service breaking capacity	15 kA at 380 V AC 50/60 Hz conforming to IEC 60947-2 5 kA at 125 V DC conforming to IEC 60947-2 5 kA at 250 V DC conforming to IEC 60947-2 50 kA at 110/130 V AC 50/60 Hz conforming to IEC 60947-2 50 kA at 220/230/240 V AC 50/60 Hz conforming to IEC 60947-2 5 kA at 440 V AC 50/60 Hz conforming to IEC 60947-2 2.5 kA at 550 V AC 50/60 Hz conforming to IEC 60947-2 7.5 kA at 400/415 V AC 50/60 Hz conforming to IEC 60947-2	
Suitability for isolation	Yes conforming to IEC 60947-2	
Utilisation category	Category A	
Trip unit name	TM-D	
Trip unit technology	Thermal-magnetic	
Trip unit rating	75 A at 50 °C	
Protection type	Short-circuit protection Overload protection	

Pollution degree	3 conforming to IEC 60664-1
	3 conforming to IEC 947-1

# Complementary

control type	Toggle
Mounting mode	Fixed
Mounting support	Backplate
Upside connection	Front
Downside connection	Front
Mechanical durability	13000 cycles
Connection pitch	25 mm
Local signalling	Positive contact indication
Neutral protection setting	Without protection
Earth-leakage protection	Without
Height	130 mm
Width	75 mm
Depth	60 mm

## **Environment**

Standards	GB/T 14048.2 JIS C8201-2-2 EN/IEC 60947-2 EN/IEC 60947-1
IP degree of protection	IP20 conforming to IEC 60529
IK degree of protection	IK07 conforming to IEC 62262
Ambient air temperature for operation	-2570 °C
Ambient air temperature for storage	-3585 °C

# **Packing Units**

•	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.5 cm
Package 1 Width	8.5 cm
Package 1 Length	14.0 cm
Package 1 Weight	843.0 g
Unit Type of Package 2	S02
Number of Units in Package 2	12
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	10.516 kg
Unit Type of Package 3	PAL
Number of Units in Package 3	384

Package 3 Height	80.0 cm
Package 3 Width	120.0 cm
Package 3 Length	384.0 cm
Package 3 Weight	323.712 ka

## **Contractual warranty**

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

#### Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint	
Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	320
Environmental Disclosure	Product Environmental Profile


### **Use Better**

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACh Regulation	REACh Declaration


### **Use Again**

○ Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


## **Dimensions Drawings**

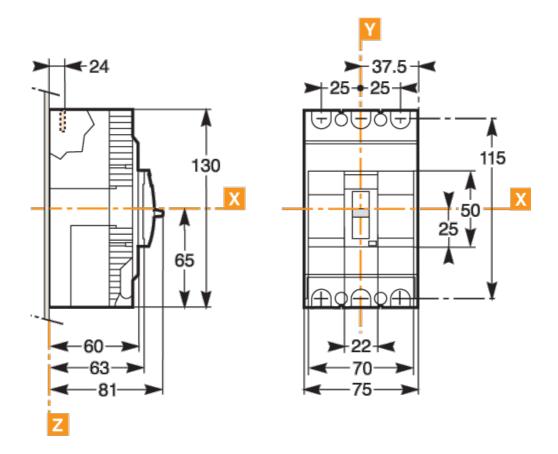

## Assembly

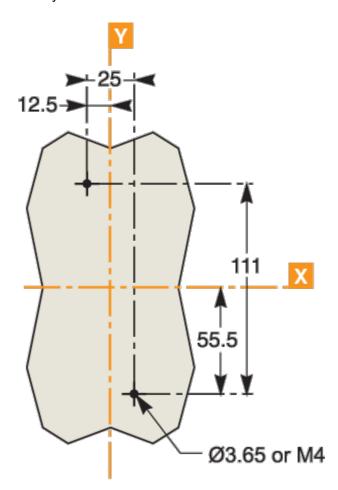

## Performance Curves

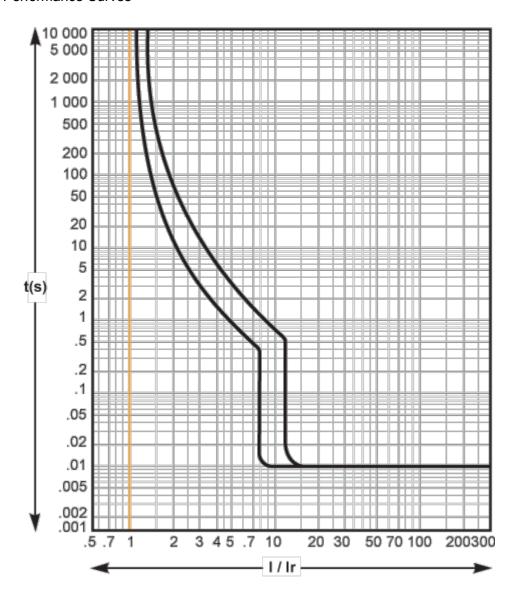

## Offer Marketing Illustration

#### **Product benefits / Features**



## Offer Marketing Illustration

#### Product benefits / Features



## Offer Marketing Illustration

#### **Product benefits / Features**

10



## **Technical Illustration**

## Assembly's dimensions

