

circuit breaker Easypact EZC250H - TMD - 125 A - 3 poles 3d

EZC250H3125

Main

Range of product	EasyPact	
Product or component type	Circuit breaker	
Device short name	Easypact EZC250H	
Circuit breaker name	Easypact EZC250H	
Device application	Distribution	
Poles description	3P	
Protected poles description	3t	
Network type	DC AC	
Network frequency	50/60 Hz	
[In] rated current	125 A at 40 °C	
[Ui] rated insulation voltage	690 V AC 50/60 Hz conforming to IEC 60947-2	
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-2	
[Ue] rated operational voltage	550 V AC 50/60 Hz conforming to IEC 60947-2 250 V DC conforming to IEC 60947-2	
Breaking capacity code	Н	
Breaking capacity	10 kA Icu at 550 V AC 50/60 Hz conforming to IEC 60947-2 25 kA Icu at 440 V AC 50/60 Hz conforming to IEC 60947-2 30 kA Icu at 125 V DC 1P conforming to IEC 60947-2 30 kA Icu at 250 V DC 2P conforming to IEC 60947-2 36 kA Icu at 380 V AC 50/60 Hz conforming to IEC 60947-2 36 kA Icu at 400415 V AC 50/60 Hz conforming to IEC 60947-2 85 kA Icu at 110130 V AC 50/60 Hz conforming to IEC 60947-2 85 kA Icu at 220240 V AC 50/60 Hz conforming to IEC 60947-2	
[Ics] rated service breaking capacity	5 kA at 550 V AC 50/60 Hz conforming to IEC 60947-2 15 kA at 125 V DC conforming to IEC 60947-2 15 kA at 250 V DC conforming to IEC 60947-2 18 kA at 380 V AC 50/60 Hz conforming to IEC 60947-2 18 kA at 400/415 V AC 50/60 Hz conforming to IEC 60947-2 12.5 kA at 440 V AC 50/60 Hz conforming to IEC 60947-2 42.5 kA at 110/130 V AC 50/60 Hz conforming to IEC 60947-2 42.5 kA at 220/230/240 V AC 50/60 Hz conforming to IEC 60947-2	
Suitability for isolation	Yes conforming to IEC 60947-2	
Utilisation category	Category A	
Trip unit name	TM-D	
Trip unit technology	Thermal-magnetic	
Trip unit rating	125 A at 50 °C	
Protection type	Short-circuit protection Overload protection	

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Pollution degree	3 conforming to IEC 60664-1
	3 conforming to IEC 947-1

Complementary

control type	Toggle
Mounting mode	Fixed
Mounting support	Backplate
Upside connection	Front
Downside connection	Front
Mechanical durability	10000 cycles
Connection pitch	35 mm
Local signalling	Positive contact indication
Neutral protection setting	Without protection
Earth-leakage protection	Without
Height	165 mm
Width	105 mm
Depth	60 mm

Environment

Standards	GB/T 14048.2 EN/IEC 60947-2 JIS C8201-2-2 EN/IEC 60947-1	
IP degree of protection	IP20 conforming to IEC 60529	
IK degree of protection	IK07 conforming to IEC 62262	
Ambient air temperature for operation	-2570 °C	
Ambient air temperature for storage	-3585 °C	

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	10.500 cm
Package 1 Width	12.000 cm
Package 1 Length	18.000 cm
Package 1 Weight	1.488 kg
Unit Type of Package 2	S03
Number of Units in Package 2	8
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	12.324 kg
Unit Type of Package 3	P12
Number of Units in Package 3	64

Package 3 Height	45.000 cm	
Package 3 Width	80.000 cm	
Package 3 Length	120.000 cm	
Package 3 Weight	110.592 ka	

Contractual warranty

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

∇ Environmental footprint	
Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	382
Environmental Disclosure	Product Environmental Profile


Use Better

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACh Regulation	REACh Declaration


Use Again

○ Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


Dimensions Drawings

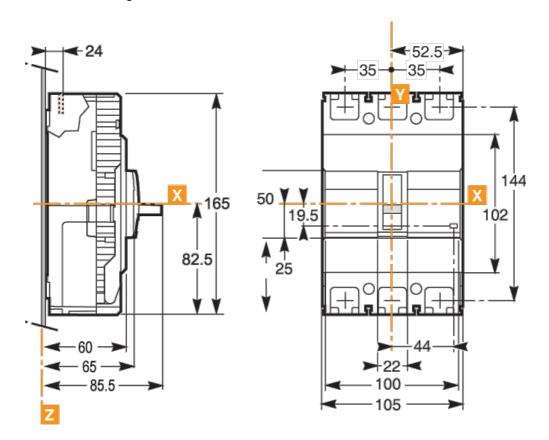

Assembly

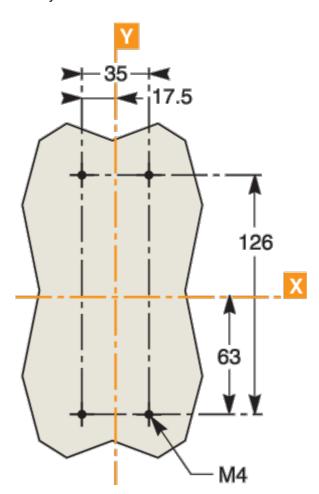

Performance Curves

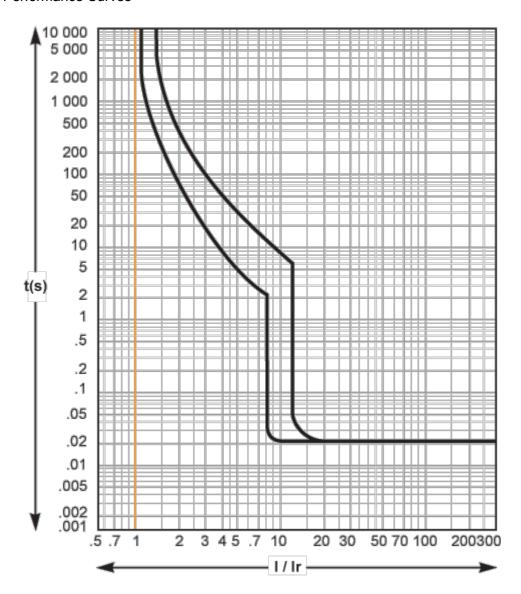

Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features



Technical Illustration

Assembly's dimensions

