Specifications



circuit breaker Easypact EZC250H -TMD - 250 A - 3 poles 3d

EZC250H3250

Main

Wall		
Range of product	EasyPact	
Product or component type	Circuit breaker	
Device short name	Easypact EZC250H	
Circuit breaker name	Easypact EZC250H	
Device application	Distribution	
Poles description	3P	
Protected poles description	3t	
Network type	AC	
	DC	
Network frequency	50/60 Hz	
[In] rated current	250 A at 40 °C	
[Ui] rated insulation voltage	690 V AC 50/60 Hz conforming to IEC 60947-2	
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-2	
[Ue] rated operational voltage	550 V AC 50/60 Hz conforming to IEC 60947-2 250 V DC conforming to IEC 60947-2	
Breaking capacity code	Н	
Breaking capacity	10 kA lcu at 550 V AC 50/60 Hz conforming to IEC 60947-2 25 kA lcu at 440 V AC 50/60 Hz conforming to IEC 60947-2 30 kA lcu at 125 V DC 1P conforming to IEC 60947-2 30 kA lcu at 250 V DC 2P conforming to IEC 60947-2 36 kA lcu at 380 V AC 50/60 Hz conforming to IEC 60947-2 36 kA lcu at 400415 V AC 50/60 Hz conforming to IEC 60947-2 85 kA lcu at 110130 V AC 50/60 Hz conforming to IEC 60947-2 85 kA lcu at 220240 V AC 50/60 Hz conforming to IEC 60947-2	
[Ics] rated service breaking capacity	5 kA at 550 V AC 50/60 Hz conforming to IEC 60947-2 15 kA at 125 V DC conforming to IEC 60947-2 15 kA at 250 V DC conforming to IEC 60947-2 18 kA at 380 V AC 50/60 Hz conforming to IEC 60947-2 18 kA at 400 V AC 50/60 Hz conforming to IEC 60947-2 12.5 kA at 440 V AC 50/60 Hz conforming to IEC 60947-2 42.5 kA at 110/130 V AC 50/60 Hz conforming to IEC 60947-2 42.5 kA at 220/230/240 V AC 50/60 Hz conforming to IEC 60947-2	
Suitability for isolation	Yes conforming to IEC 60947-2	
Utilisation category	Category A	
Trip unit name	TM-D	
Trip unit technology	Thermal-magnetic	
Trip unit rating	250 A at 50 °C	
Protection type	Overload protection Short-circuit protection	

Complementary

control type	Toggle	
Mounting mode	Fixed	
Mounting support	Backplate	
Upside connection	Front	
Downside connection	Front	
Mechanical durability	10000 cycles	
Connection pitch	35 mm	
Local signalling	Positive contact indication	
Neutral protection setting	Without protection	
Earth-leakage protection	Without	
Height	165 mm	
Width	105 mm	
Depth	60 mm	

Environment

Standards	EN/IEC 60947-2 EN/IEC 60947-1 GB/T 14048.2	
IP degree of protection	IP20 conforming to IEC 60529	
IK degree of protection	IK07 conforming to IEC 62262	
Ambient air temperature for operation	-2570 °C	
Ambient air temperature for storage	-3585 °C	

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	10.400 cm
Package 1 Width	12.200 cm
Package 1 Length	18.000 cm
Package 1 Weight	1.584 kg
Unit Type of Package 2	S03
Number of Units in Package 2	8
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	13.447 kg
Unit Type of Package 3	P12
Number of Units in Package 3	64
Package 3 Height	50.000 cm

Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	119.576 kg

Contractual warranty

Warranty

18 months

🜔 Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Carbon footprint (kg.eq.CO2 per CR, Total Life cycle) 656

Environmental Disclosure

Product Environmental Profile


Use Better

Packaging made with recycled cardboard	Yes	
Packaging without single use plastic	Yes	
EU RoHS Directive	Compliant	
REACh Regulation	REACh Declaration	


Use Again

\circlearrowright Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

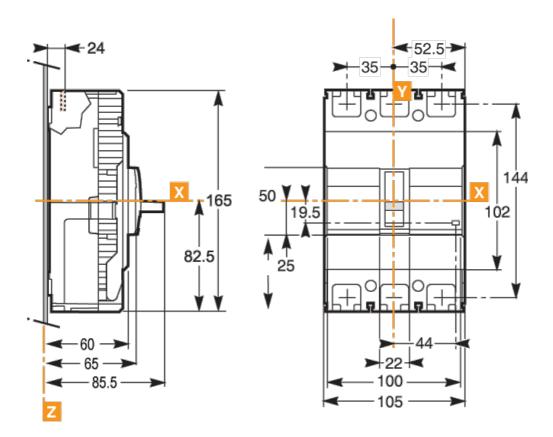


Assembly

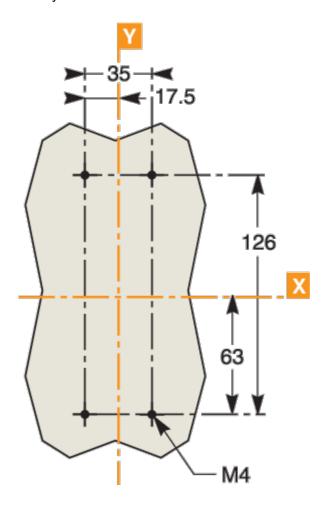

6

Performance Curves

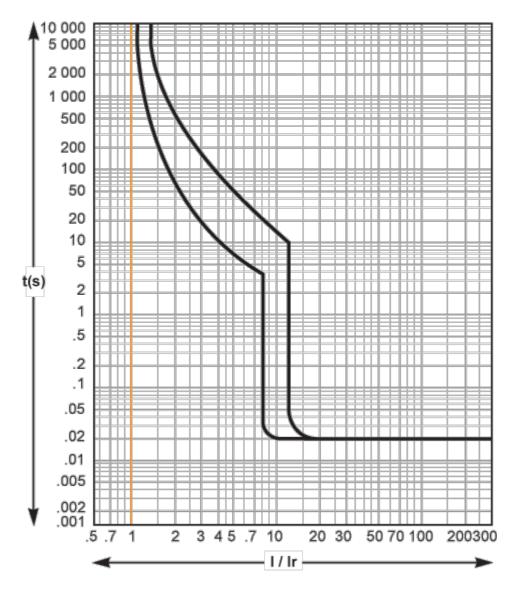

Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features



Technical Illustration

Assembly's dimensions

